

1341-2 Node Box - Core 2 Duo



Features:

- Fanless Design
- Intel Core 2 Duo Processor
- PCI-E x 2
- DC Power Input
- Dual Ethernet, COM x 4, USB x 4, Audio, CompactFlash
- Anti-Vibration and Shock Resistant
- Machine Control, Security Node, Data Analyzer Platform
- ATX Power Function

Performance Specifications


Models	1341-2	
Chipset	Intel® 945GME + ICH7M	
CPU	Intel® Core™ 2 Duo Processor	
System Memory	200-pin DDR2 SODIMM x 1, Max. 2GB	
Display Interface	VGA	DB-15, shared system memory up to 224MB/ DVMT 3.0
	Others	TV-out
Storage Device	CF	Type 2 CompactFlash™ Slot x 1
	SSD	SATA 1.5GB/IDE 2.5
Front I/O	Audio	Line-in/ Line-out/ Mic-in, requires an extension cable
	Others	Cardbus slot x 1, S-video x 1, SYS, Reset button x 1, 2 PCMCIA slots
Rear I/O	USB Port	4
	LAN	Gigabit Ethernet Ports x 2
	Serial Port	RS-232 x 3, RS-232/422/485 x 1
	KB/MS	1
Expansion	Others	Power Inlet x 1 (DC)
	PCIe [x1]	[x16] x1
	PCI	2
Indicator	Others	Card bus x 1, type 2 or Card bus x2 type 1
	Front	System LED x 1, HDD LED x 1

*1 Unable to be added by users. *2 Reserved from main memory

General Specifications

Models	1341-2
Input Voltage	DC 9-30V
Power Consumption	DC 12V/3.58A (T7200)
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Certifications	UL, LVD, CE/FCC class A,cUL, CSA
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)
Relative Humidity	5% ~ 95% @ 40°C, non-condensing
Corrosive Gas	Free of corrosive gases
Cooling Method	Passive cooling
Vibration Resistance	5 g rms/ 5 ~ 500Hz/ operation – CFD, 1 g rms/ 5 ~ 500Hz/ operation – HDD
Anti-Shock	50 G peak acceleration (11 msec. duration) – CFD
Weight	12.76 lb (5.8 Kg)
External Dimensions	8.4"(W) x 3.7"(H) x 9.4"(D) (214mm x 94.8mm x 237.8mm)
Warranty	Two (2) years

External Dimensions

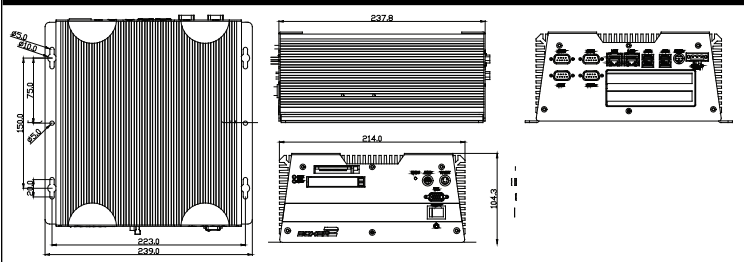

Ordering Information

Part Number	Description
1341-2000-1G-4GB-XP	1341 Core Duo - 1GB, preinstalled with Windows XP
1341-2000-2G-8GB-XP	1341 Core Duo - 2GB, preinstalled with Windows XP

Pro-face America
 Phone: 734.477.0600
 Fax: 734.864.7347
 www.profaceamerica.com
 DS-1341-2(B)

Customer Service Hotline: 800.289.9266
 For more information

ACCESS www.profaceamerica.com





California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca